

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/068333 A2**

(51) International Patent Classification<sup>7</sup>: **C01G 33/00**

(21) International Application Number: **PCT/US02/05954**

(22) International Filing Date: **27 February 2002 (27.02.2002)**

(25) Filing Language: **English**

(26) Publication Language: **English**

(30) Priority Data:  
**60/271,983**      **28 February 2001 (28.02.2001)**      **US**

(71) Applicant: **CABOT CORPORATION [US/US];** Two Seaport Lane, Suite 1300, Boston, MA 02210-2019 (US).

(72) Inventors: **KITCHELL, Ricky, W.;** 110 Spring View Drive, Douglassville, PA 19518 (US). **WOLBACH, Heather, L.;** 15 Hilltop Drive, Cherry Hill, NJ 08003 (US).

(74) Agents: **CHEATHAM, Timothy, A. et al.;** Cabot Corporation, 157 Concord Road, P.O. Box 7001, Billerica, MA 01821-7001 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Published:**

— *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **METHODS OF MAKING A NIOBIUM METAL OXIDE**

(57) Abstract: Methods to at least partially reduce a niobium oxide are described. In one embodiment, a milling process is described wherein the surfaces of the mill in contact with the starting metal oxide, getter material, and/or oxygen reduced metal oxide are the same as the material being milled. Other milling techniques and products are also described.

## METHODS OF MAKING A NIOBIUM METAL OXIDE

**BACKGROUND OF THE INVENTION**

This application claims the benefit under 35 U.S.C. §119(e) of prior U.S. Provisional Patent Application No. 60/271,983 filed February 28, 2001, which is incorporated in its entirety by reference herein.

The present invention relates to niobium and oxides thereof and more particularly relates to niobium oxides and methods to minimize contamination when making at least partially reduced niobium oxide and oxygen reduced niobium.

With the ever-increasing demand for capacitor materials such as tantalum, alternatives to tantalum have become an important priority in order to meet industry demands. Niobium is becoming one of the alternatives to tantalum but, as the industry has realized, niobium is not a complete substitute for tantalum due to niobium not providing the same electrical properties. Accordingly, further developments in the niobium area continue today.

Another alternative to tantalum is niobium metal oxides that have been oxygen reduced, in other words, niobium suboxides such as NbO and the like. The oxygen reduced niobium oxides show considerable promise as providing an additional material that can be used in the formation of capacitor anodes. In order to further satisfy industry demands, several properties of the oxygen reduced niobium oxides should preferably be improved such as the crush strength of the oxygen reduced niobium oxides, as well as efforts to reduce the amounts of contamination that occurs in the manufacturing of the oxygen reduced niobium oxides. In addition, acid leaching is commonly used to reduce the level of contamination occurring when niobium is milled to achieve particular particle sizes. This acid leaching complicates the manufacturing process and adds to additional costs to the manufacturing process.

2

In addition, the flow property of the oxygen reduced niobium oxides could be further improved to better satisfy industry standards.

Accordingly, there is a need to overcome one or more of the above-described disadvantages.

5

#### SUMMARY OF THE PRESENT INVENTION

A feature of the present invention is to provide oxygen reduced niobium oxides that have improved crush strength.

Another feature of the present invention is to provide a method to make oxygen  
10 reduced niobium oxides that preferably avoid the step of acid leaching.

A further feature of the present invention is to provide methods of making oxygen reduced niobium oxides that avoid mixing getter material with a starting niobium oxide in dry form.

Furthermore, an additional feature of the present invention is to provide a method of  
15 making oxygen reduced niobium oxides such that the getter material and the starting niobium oxide are relatively close with respect to the particle distribution of each component.

Another feature of the present invention is to provide a method for permitting a more uniform milling of the getter material, the starting niobium oxide, and/or the final product.

Another feature of the present invention is to use at least one milling step/stage to  
20 reduce the size of the getter material and the starting niobium oxide.

Additional features and advantages of the present invention will be set forth in part in the description which follows, and in part will be apparent from the description, or may be learned by practice of the present invention. The objectives and other advantages of the present

invention will be realized and attained, by means of the elements and combinations particularly pointed out in the written description and appended claims.

To achieve these objectives and other advantages, and in accordance with the purposes of the present invention as embodied and broadly described herein, the present invention relates to a method to at least partially reduce a niobium oxide. This method includes the steps of milling a getter material, starting niobium oxide, and/or oxygen reduced niobium oxide in a mill, wherein the surfaces of the mill in contact with the getter material and/or starting niobium oxide and/or oxygen reduced niobium oxide are niobium metal, an oxide thereof, an alloy thereof, or a doped niobium.

10 In addition, the present invention relates to a method to at least partially reduce a niobium oxide. This method includes the steps of milling a starting niobium oxide, a getter material, or both, wherein the milling involves sequential milling. In particular, the milling, using the milling media, such as the milling balls, has at least two milling stages wherein in the first stage the diameter of the milling media is larger than the diameter of the milling media  
15 used in the second stage of milling, and so on. This variation in the diameter of the milling media results in faster milling times to achieve the targeted particle size of the getter material, starting niobium oxide, oxygen reduced niobium oxide, or combinations thereof. Furthermore, this stage milling results in a narrower particle distribution range which is beneficial with respect to a variety of properties including electrical properties of a capacitor made from such  
20 materials.

The present invention also relates to niobium getter material, starting niobium oxide, or the oxygen reduced niobium oxide or any combination thereof having a narrow particle distribution range. Preferably the particle distribution range is in a range wherein the D10

4

and/or D90 is within 25% of the D50 and more preferably within 20% of the D50 and more preferably within 10% of the D50 of the getter material, starting niobium oxide, and/or oxygen reduced niobium oxide.

5 The present invention further relates to a method to at least partially reduce a niobium oxide which includes the step of wet milling the getter material and the starting niobium oxide separately in a mill. This process achieves a more uniform particle distribution for each individual component such that when the two components are combined, the particle distribution is relatively the same.

10 The present invention also relates to wet milling the getter material and the starting niobium oxide together, which also achieves the above-described advantages.

The present invention also relates to milling (wet or dry) the oxygen reduced niobium oxide once formed.

The present invention also relates to an oxygen reduced niobium oxide having excellent crush strength, good flowability, low leakage, and/or low impurities.

15 The present invention further relates to a method to at least partially reduce a niobium oxide, which avoids an acid leaching process.

The present invention further relates to capacitor anodes containing the niobium oxides of the present invention and having other beneficial properties.

20 It is to be understood that both the foregoing general description and the following detailed description are exemplary and explanatory only and are intended to provide further explanation of the present invention, as claimed.

**BRIEF DESCRIPTION OF THE DRAWINGS**

Figures 1 and 2 are graphs plotting time vs. particle size for NbO samples using staged milling.

**5 DETAILED DESCRIPTION OF THE PRESENT INVENTION**

The present invention relates to various steps that can be incorporated into a method to make oxygen reduced niobium oxides or other oxygen reduced metal oxides. In general, the present invention can include reducing the particle size of the starting niobium metal oxide, the getter material, or the oxygen reduced niobium oxide by various milling techniques. In one  
10 milling technique, one or more of the above-described materials can be milled wherein all of the surfaces that come in contact with the getter material, oxygen reduced niobium oxide, and/or the starting niobium oxide are niobium, an alloy thereof, an oxide thereof, a nitride thereof, or doped niobium (e.g., doped with nitrogen, oxygen, sulfur, phosphorus, boron, yttrium, and the like). When the material is a metal different from niobium, that metal (or an  
15 alloy thereof, a nitride thereof, or a doped metal) can be used on the contact surfaces of the various components of the mill.

Another milling step that can be used alone or in combination with the above step involves staged milling. In staged milling, there are at least two stages of milling wherein in the first stage, the diameter of the milling media is larger than the diameter of the milling  
20 media used in the second and subsequent stages of milling. This staged milling leads to a variety of beneficial properties including a narrower particle distribution range of the finished material, whether that material is a getter material, starting niobium oxide, and/or a finished oxygen reduced niobium oxide. In addition, the stage milling leads to faster milling times to

6.

achieve the targeted particle size of the getter material, starting niobium oxide, and/or finished oxygen reduced niobium oxide.

Any preliminary or intermediate or final milling step can be used in addition to the milling steps described herein. For example, a jet milling can be used at any point.

5       The starting niobium oxide used in the present invention can be in any shape or size. Preferably, the niobium oxide is in the form of a powder or a plurality of particles. Examples of the type of powder that can be used include, but are not limited to, flaked, angular, nodular, and mixtures or variations thereof. Preferably, the niobium oxide is in the form of a powder, which more effectively leads to the oxygen reduced niobium oxide. Examples of such preferred  
10       starting niobium oxide powders include those having mesh sizes of from about 60/100 to about 100/325 mesh and from about 60/100 to about 200/325 mesh. Another range of size is from – 40 mesh to about –325 mesh.


      The getter material for purposes of the present invention is any material capable of reducing the starting metal oxide to the oxygen reduced metal oxide. Preferably, the getter  
15       material is any material capable of reducing the starting niobium oxide to the oxygen reduced niobium oxide. Preferably, the getter material is niobium. Other metal or non-metal containing getter materials can be used alone or in addition. The niobium getter material for purposes of the present invention is any material containing niobium metal, which can remove or reduce at least partially the oxygen in the niobium oxide. Thus, the niobium getter material can be an  
20       alloy or a material containing mixtures of niobium metal with other ingredients. Preferably, the niobium getter material is predominantly, if not exclusively, niobium metal. It is preferred that high purity niobium metal comprises the getter material to avoid the introduction of other impurities during the heat-treating process. Accordingly, the niobium metal in the niobium

7.

5       The getter material can be in any shape or size. For instance, the getter material can be in the form of a tray, which contains the niobium oxide to be reduced, or can be in a particle or powder size. Preferably, the getter materials are in the form of a powder in order to have the most efficient surface area for reducing the niobium oxide. The getter material, thus, can be flaked, angular, nodular, and mixtures or variations thereof.

15 invention and all of these applications are incorporated herein in their entirety.

20



BNSDOCID: <WO\_\_\_\_\_02068333A2\_I\_>



NbO. In more detail, there are typically two processes involved in preparing the niobium suboxides of the present invention. One process involves the preparation of the getter material and the other part of the process involves the use of the getter material along with the starting niobium oxide to form the niobium suboxide of the present invention. In preparing the getter material, which is preferably niobium powder, a niobium ingot is subjected to a hydriding process in order to embrittle the niobium metal for purposes of crushing the ingot into powder, which is subsequently subjected to a screen in order to obtain a uniform particle distribution, which is preferably from about 5 to about 300 microns in size. If needed, the powder can be subjected two or more times to the crusher in order to achieve the desired uniform particle distribution. Afterwards, the powder is then preferably subjected to milling in order to obtain the desired particle size, which is from about 1 to about 5 microns in size.

In this process, the milling of the niobium metal in order to form the niobium getter powder preferably occurs in a mill wherein all of the surfaces that come in contact with the niobium getter material are niobium. In other words, preferably all of the contact surfaces of the mill, arms, and grinding media used in the mill have a niobium surface. The niobium surface on the contact areas of the mill and grinding media can be accomplished by coating the grinding media and internal surfaces of the mill with niobium metal or plates of niobium metal can be placed (e.g., welded) in the mill. The grinding media, such as balls, can be coated with niobium or can be completely made of niobium. By having all contact surfaces of the mill and grinding media made of niobium, the amount of contamination to the niobium getter material is significantly reduced, and preferably reduced to such a level that acid leaching is not necessary and is preferably avoided. This is especially advantageous since acid leaching can be inconsistent and lead to varying levels of contamination from lot to lot.

Preferably, the amount of niobium present on the contact surfaces of the mill and grinding media is of a sufficient level such that during the milling process, none of the non-niobium underlying surfaces come in contact with the niobium getter material. Preferably, the thickness (e.g., about 1mm or less to about 100 mm or more) of the niobium on the contact surfaces of the mill and grinding media is sufficient such that repeated milling can occur from lot to lot. Preferably, the milling of the niobium getter powder occurs in a wet mill, which leads to a more uniform particle distribution size of the getter material. In wet milling, the liquid used can be aqueous or non-aqueous, such as water, alcohol, and the like. Preferably, the milling is sufficient to reduce the size to a range of from about 1 to about 10 microns, and more preferably, from about 1 micron to about 5 microns.

Similarly, in the present invention, the starting niobium oxide can be subjected to milling, e.g., wet milling, in order to achieve a more uniform particle distribution. Typically, the milling time required to achieve a similar particle distribution size of the starting niobium oxide as compared to the niobium getter material requires less time. Preferably, the milling, and more preferably, the wet milling of the starting niobium oxide occurs in a similar milling set-up used with respect to the niobium getter powder. In other words, preferably, the contact surfaces of the mill, arms, and grinding media are preferably niobium metal to again avoid contamination of the starting niobium oxide. Preferably, the milling is sufficient to reduce the size of the starting niobium oxide to a size substantially similar to the getter material. In one sense, the starting niobium oxide is de-agglomerated by the milling.

In a preferred embodiment of the present invention, the milling, and preferably wet milling of the getter material and the starting niobium oxide are milled to the extent that the two components have similar particle distribution sizes. For instance, the particle distribution

sizes preferably of the two components are such that the D10, D50, and D90 for each component are within 25% of each other and more preferably within 20% of each other and even more preferably within 10% of each other. The advantage of having similar particle distribution sizes leads to an improved rate of forming the oxygen reduced niobium oxide. In other words, when the sizes of the two components are similar, the getter material more uniformly accepts oxygen from the starting niobium oxide and similarly, the starting niobium oxide more readily is reduced. Thus, the final product, which is the oxygen reduced niobium oxide, is more uniform and includes as part of the final product, the niobium getter material which has been transformed as well to the oxygen reduced niobium oxides. This reaction rate is also increased due to the shorter distance for the oxygen to diffuse out of the starting niobium oxide and to diffuse into the getter material. This shorter distance also minimizes oxygen gradients within the final product, resulting in a more stable product. By improving the reaction kinetics, the processing temperature for the reaction may be decreased to a temperature that is more favorable for the formation of preferred oxygen reduced niobium oxides, such as NbO.

In a preferred embodiment of the present invention, the milling, and more preferably, the wet milling of the getter material and the starting niobium oxide occur together. In more detail, the milling (e.g., wet milling) of the getter material and the starting niobium oxide can occur simultaneously wherein both materials are introduced in a mill, as described above, and uniformly mixed together in the mill for purposes of achieving a uniform mixture as well as uniform particle size. However, since the amount of time necessary to achieve the same particle size varies between the getter material and the starting niobium oxide, preferably, the getter material is introduced first and milled alone for a certain time, such as a particular targeted size of, for instance, from about 1 to about 10 microns. Then the starting niobium

11

oxide is introduced into the same mill and the milling is continued with both components present, until a targeted size of both particles is obtained, which is preferably from about 1 micron to about 10 microns, and more preferably, from about 1 to about 5 microns. In a preferred embodiment, the getter material achieves a particle size of about 2 microns and the starting niobium oxide achieves a particle size of about 4 microns. In a preferred embodiment, the milling occurs in an Attritor mill such as a 1 S mill which is operated at about 350 rpms. When the milling is completed, the mixture can then be subjected to the heat treatment as described in the previous applications incorporated herein.

The milling of the getter material, the starting niobium oxide, and/or the final product can also occur sequentially by milling with varying ball diameters. This use of staged milling can be used as a step in and of itself or can be used in combination with one or more of the above-described steps. This preferred method dramatically reduces the time required to obtain a desired particle size and distribution. The milling of the getter material, for instance, can occur in stages in different mills or in the same mill. In the preferred embodiment, faster milling is achieved early in the process by using a large ball diameter to product diameter ratio.

When the product population increases, the ball diameter should be reduced in order to increase the ratio of balls to product, and thereby increasing the chances of the product being hit and shattered. Preferably, the size of the getter material and/or the starting niobium oxide (hereinafter feedstock) can be as large as 1/10 of the size of the ball diameter. This feedstock-to-ball ratio can be used until the feedstock-to-ball ratio size is from about 1/1000 to about 1/500, more preferably, until the feedstock-to-ball ratio is about 1/200. The ball diameter can then be changed so that the ratio of feedstock-to-ball diameter is about 1/10. This process can be continued until the original feedstock reaches a size of from about 5 to about 1 microns and

can further be used to make sub micron particles. The balls tend to reduce the larger particles faster than the smaller ones. Therefore, rather than using very small ball diameter balls for the second milling step, which would take more time and create a broad distribution, a ball diameter is sequentially selected that takes advantage of being relatively massive while still  
5 being numerous, and yet follow the 1/10 ratio of feedstock-to-ball diameter.

In the staged milling embodiment of the present invention, two or more stages of milling using increasingly smaller diameters are used. In other words, in the first initial milling stage, the diameter of the milling media is larger than the diameter of the milling media used in the second stage. Furthermore, if more than two stages are used, preferably each subsequent  
10 milling stage uses a milling media that has a diameter smaller than the previous milling stage. More than two milling stages can be used depending upon the desired particle size of the final product. For purposes of the present invention, at least two stages of milling accomplish the desired result, namely a product having a particle size of from about 1 micron to about 5 microns. Sub micron particles can be obtained by use of this technique.

15 Using the stage milling, the overall milling time can be reduced by at least 10% and more preferably can be reduced by at least 15% and even more preferably by at least 50% compared to milling having only one stage of milling using the same milling media.

In the preferred embodiment, in each milling stage, the ball diameter is smaller than the ball diameter of the previous milling stage. The above process permits a more uniform milling  
20 of the feedstock, since smaller diameter balls permit a more uniform milling. This stage milling can be applied to the milling of any of the component(s) used in the present invention. The advantage of using this preferred method of the present invention is that this method reduces the overall milling time to achieve the target size of from about 1 micron to about 5

microns. Additionally, the reduction of the milling time reduces the production costs and exposure time to contaminants. Moreover, to further reduce contamination, each mill and its grinding ball can be made of niobium metal or lined with niobium metal. Preferably, the milling process of this preferred method is a wet milling process. An example of a suitable ratio for a wet milling process is 800 grams of niobium powder to 300 ml of water. (e.g., 600 g for NbO and about 250 g Nb<sub>2</sub>O<sub>5</sub>) The remaining volume in the mill is taken up by milling media. Dry milling can be used in lieu of wet milling, and generally, the milling process takes place in an inert atmosphere.

For purposes of the present invention, any of the milling steps described in the present application can be conducted under heat, such as described in International Published PCT Patent Application No. WO 00/56486 incorporated in its entirety by reference herein. Also, other additives can be added during any milling step, such as a binder, lubricant, surfactant, dispersant, solvent, and the like.

With the present invention, a narrower particle distribution range can be achieved for the getter material, starting niobium oxide, and/or oxygen reduced niobium oxide. For instance, the particle size distribution range can be such that the D10 and/or D90 is within 25% of the D50 and more preferably is within 20% or 10% of the D50. Such a tighter particle distribution range leads to favorable properties especially with respect to improved electrical properties, such as in the anode containing the oxygen reduced niobium oxide. In addition, a tighter particle distribution range leads to a better quality control of the finished product since each batch of material preferably has more similar physical and electrical properties.

If not milled together, the milled niobium getter powder can then be mixed with the milled starting niobium oxide material. If already mixed, the mixed or blended getter powder

and starting niobium oxide material, which is preferably  $\text{Nb}_2\text{O}_5$  can then be subjected to an inert gas heat treatment. The temperature and the time of the heat treatment can depend on a variety of factors, such as the amount of reduction to the niobium oxide, the amount the getter material, and the type of getter material as well as the type of starting niobium oxide. Routine testing in view of the present application will permit one skilled in the art to readily control the times and the temperatures of the heat treatment in order to obtain the proper oxidized reduction of the niobium oxide.

The inert gas heat treatment preferably occurs in a hydrogen-containing atmosphere, and more preferably in a pure hydrogen atmosphere. Other gases can also be present with the hydrogen, such as inert gases, so long as the other gases do not react with the hydrogen. Furthermore, during the heat treatment process, a constant heat treatment temperature can be used during the entire heat-treating process or variations in the temperature or the temperature steps can be used.

Once the heat treatment is complete and the desired oxygen reduced niobium oxide is obtained, the powder can then be pressed into an anode using conventional methods of forming anodes from valve metals. In the present invention, the oxygen reduced niobium oxide has significantly improved flow properties as well as crush strength and further has low impurities which all lead to beneficial capacitor anode properties, such as an extremely low leakage.

In more detail, the crush strength of the oxygen reduced niobium oxide preferably has a ten fold increase compared to the oxygen reduced niobium oxides formed using the previous methods of making the oxygen reduced niobium oxides, such as those described in U.S. Patent Application No. 09/154,452.

The crush strength and other properties are preferably achieved by taking the oxygen reduced niobium oxide formed from the above-described preferred process of the present invention and combining it with a sufficient amount of binder in order to form the capacitor anode. Preferably, the amount of binder used is from about 1% to about 5% by weight based on the weight of the capacitor anode. Suitable binders include, but are not limited to, PEG and Q-Pak. Other suitable binders are described in one of the earlier referenced applications, which are incorporated in their entireties by reference herein.

The flow properties of the oxygen reduced niobium oxides of the present invention are preferably improved as well as the impurity levels of the oxygen reduced niobium oxides, as shown in the examples.

An additional embodiment of the present invention involves milling of the oxygen reduced niobium oxide, such as NbO. In more detail, after the heat treatment and formation of the oxygen reduced niobium oxides, the final product can then be milled, such as by wet milling, in order to achieve a more uniform particle size distribution. Preferably, the particle size can range from about 1 micron to about 10 microns and more preferably from about 1 micron to about 5 microns. The milling of the final product can occur in combination with the above-mentioned milling steps. However, if the milling of the starting niobium oxide and the niobium getter material occurs prior to the heat treatment, the milling of the final product can be avoided. If the starting niobium oxide is not milled but simply mixed with the niobium getter material, for instance, then it is preferred that the resulting oxygen reduced niobium oxides are milled afterwards once the final product is formed. As shown in the examples, this post-milling of the final product can lead to significantly improved crush strength properties.



Once the oxygen-reduced niobium oxides are formed, as indicated above, the particles can be mixed with a binder in the amounts indicated above and then optionally compacted. The particles, if desired, can then be crushed sufficiently to form a particle distribution of from about 100 microns to about 500 microns, and more preferably from about 100 microns to about 300 microns. These particles can then be pressed into anodes and sintered for anode production using conventional techniques known to those skilled in the art. As shown in the examples, the crush strength of the oxygen-reduced niobium powders of the present invention are significantly improved compared to previous oxygen reduced niobium oxides and further have significantly lower leakage.

While the above-described embodiments have been discussed using niobium as the preferred material, the present invention equally applies to other valve metal getter materials, other valve metal oxygen reduced materials, and other starting valve metal oxides, as described in U.S. Patent No. 6,322,912 B1, which is incorporated in its entirety by reference herein.

The present invention will be further clarified by the following examples, which are intended to be exemplary of the present invention.

## **EXAMPLES**

### **Example 1**

According to the preferred embodiment of the invention, the beginning feedstock was a highly purified crushed niobium hydride screened to 40 mesh (420 microns). This feed material was milled in an Attritor mill to obtain the desired size reduction of microns. The mill itself was lined with Nb and was outfitted with Nb arms to eliminate contamination concerns. The milling was accomplished by stirring 3/16 inch Nb balls in water and then

17

adding the 40 mesh Nb powder to create a slurry. The slurry was stirred for a short time (5 to 10 minutes) to quickly reduce the size of the feed to around 140 mesh (~100 micron). This material was drained from the mill and separated from the 3/16 inch milling media using a screen. 1/16" Nb media was placed in the mill and the slurry returned to the mill.

- 5 The mill was then operated an additional 10-15 minutes with the smaller media to obtain the desired D50 of ~ 5 microns.

### Example 2

- To test the improvement in crush strength due to milling, a broadly distributed NbO powder sample was milled to reduce the average particle size and tighten the particle distribution. The following procedure was used:

#### A. Post Reaction Milling

- A NbO sample (#8587-48) was wet milled in an 01HD Attritor mill with 1.5 mm Nb balls for approximately 8 minutes to de-agglomerate the powder. The mill was operated at 1000 RPM. Water was used with the powder to create the slurry for milling. Once milled, the slurry and milling media were dumped from the mill and separated via screening. The slurry was allowed to settle and the excess water was removed by decanting. The remaining cake was dried, crushed and screened and assigned the sample number of 8587-48-UP1.

#### Crush Evaluation

- 20 Representative anodes of the resulting powder were pressed at 3.0 and 3.5 g/cc press density (Dp). Results are shown below compared to the unmilled powder.

18

	Unmilled	Unmilled	Milled	Milled
Sample	8587-48 @ 3.0Dp	8587-48 @ 3.5 Dp	8587-48-UP1 @ 3.0 Dp	8587-48-UP1 @ 3.5 Dp
Average Crush (lbs)	0.33	1.13	2.48	6.91
	Pre-milled getter		Pre-milled getter NbO milled	

As shown in the above table, the milled NbO samples using Nb balls have much higher average crush weight.

### 5 Example 3

To test the rate of particle size reduction and particle size distribution due to changing the milling media diameter, coarse feed was introduced to the attritor mill with larger milling media for a short period and then remilled using smaller media. The response to milling with a  
10 single ball size versus changing ball diameters is shown in Figure 1.

As shown in Fig. 1, in 10 minutes the staged milling process reduced the particle size from about 40 mesh to about 12 microns. The media was then replaced with smaller media and milling resumed to obtain an average particle size of just under 5 microns in about 35 minutes total. In contrast, to get the same particle size in the same time using a single ball  
15 diameter, the starting feedstock had to start at a much smaller size of ~ 13 microns made by earlier milling runs.

### Example 4

A starting material having a size of 40 mesh (420 microns) was introduced into the mill. A beginning ball diameter of 3/16" was selected to reduce the size of the starting  
20 material. A 3/16" diameter ball was selected because it is about 10 times as large as the starting material. As can be seen in Figure 2, the milling rate reduces quickly when the

starting material average size is reduced to about 13 microns. As such, the 3/16" diameter balls were replaced with 1/16" diameter balls to further reduce starting material size, when starting material size D90 reached about 1/200 of the ball diameter. The 1/16" diameter balls take advantage of being relatively massive while still being numerous. Thus, one can further reduce the starting material size in a very time efficient manner. D10 refers to the particular size at which 10% of the particles are smaller. D50 refers to the average particle size of the entire particle distribution and D90 is the particle size at which 90% of the particles are larger.

Other embodiments of the present invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as exemplary only, with a true scope and spirit of the invention being indicated by the following claims and equivalents thereof.

**WHAT IS CLAIMED IS:**

1. A method to reduce the size of a material comprising  
milling said material in a mill wherein the surfaces of the mill that come in contact with said material comprise niobium, or an alloy thereof, an oxide thereof, a nitride thereof, or a niobium with at least one dopant, wherein said material is niobium getter material, niobium oxide, oxygen reduced niobium oxide, or combinations thereof.
2. The method of claim 1, wherein said contact surfaces of the mill comprise one or more arms, grinding media, and the contact surface of the mill itself.
3. The method of claim 1, wherein said surfaces are coated with niobium or are plates of niobium metal that are attached to the surfaces of the mill.
4. The method of claim 1, wherein said grinding media is one or more balls which are coated with niobium or are completely made of niobium.
5. The method of claim 1, wherein the amount of niobium present on the contact surfaces of the mill and grinding media is of a sufficient level such that during the milling process, none of the non-niobium underlying surfaces come in contact with said material.
6. The method of claim 5, wherein the thickness of the niobium on the contact surfaces of the mill and grinding media is sufficient such that repeated milling can occur from lot to lot.
7. The method of claim 5, wherein the thickness of the niobium on the contact surfaces is from about 1 mm to about 100 mm.
8. The method of claim 1, wherein said starting niobium oxide and said getter material are milled at about the same time in the same mill.
9. The method of claim 1, wherein said milling is staged milling.

10. The method of claim 1, wherein said milling comprises milling with at least one milling media having a first size and then milling with a second milling media having a size smaller than the first milling media.

11. The method of claim 1, wherein said milling comprises milling with at least one ball having a first ball diameter and then milling with at least one ball having a ball diameter that is smaller than said first ball diameter.

12. The method of claim 1, wherein said milling comprises two or more milling steps wherein each subsequent milling uses a milling media having a size smaller than the previous milling step.

13. The method of claim 1, wherein said material is present with at least one binder, dispersant, solvent, surfactant, lubricant, or combinations thereof.

14. The method of claim 1, wherein said oxygen reduced niobium oxide is present with at least one binder, dispersant, solvent, surfactant, lubricant, or combinations thereof.

15. A method of milling material comprising milling said material with a milling media having a first size and then milling said material with a milling media having a size smaller than said first size, wherein said material comprises a getter material, a starting niobium oxide, an oxygen reduced niobium oxide, or combinations thereof.

16. The method of claim 15, wherein said milling media and said second milling media are milling balls.

17. The method of claim 15, wherein said material is no smaller than about 1/10 of said first ball diameter.

18. The method of claim 17, wherein said first ball diameter is replaced by said second ball diameter when said material is from about 1/100 to about 1/1000 size of first said ball diameter.

19. The method of claim 15, wherein said second ball diameter is less than about 10 times said size of said material.

20. The method of claim 15, further comprising at least one additional milling step using milling media wherein the size of the milling media has an increasingly smaller size compared to the most previous milling step.

21. The method of claim 18, wherein said first ball diameter is replaced by said second ball diameter when said material reaches a size of from about 1/100 to about 1/1000 of said first ball diameter.

22. The method of claim 21, wherein said second ball diameter is less than about 10 times said size of said material.

23. A method to reduce the size of a material comprising milling said material in a mill wherein the surfaces of the mill that come in contact with said material comprise the same metal or alloy thereof, an oxide thereof, a nitride thereof, or said metal with at least one dopant, present is said material, wherein said material is getter material, a metal oxide, an oxygen reduced metal oxide, or combinations thereof

24. The method of milling material comprising milling said material with a milling media having a first size and then milling said material with a milling media having a size smaller than said first size, wherein said material comprises a getter material, a starting metal oxide, an oxygen reduced metal oxide, or combinations thereof.

23

25. The method of claim 1, wherein said getter material is first introduced into said mill and is milled for a predetermined time and then said starting niobium oxide is introduced into said mill and said getter material and said niobium oxide are milled together.

26. The method of claim 25, wherein said starting niobium oxide is introduced in to said mill after the particle size of said getter material is from about 1 to about 1 to about 10 microns.

27. A material selected from niobium oxide, getter material, or oxygen reduced niobium oxide, said material having a particle distribution range or wherein the D10, D90, or both is within 25% of the D50.

28. The material of claim 27, wherein said particle distribution range is in a range wherein the D50, D90, or both is within 20% of the D50.

29. The material of claim 27, wherein said particle distribution range is in a range wherein the D10, D90, or both is within 10% of the D50 of the material.



1 / 2

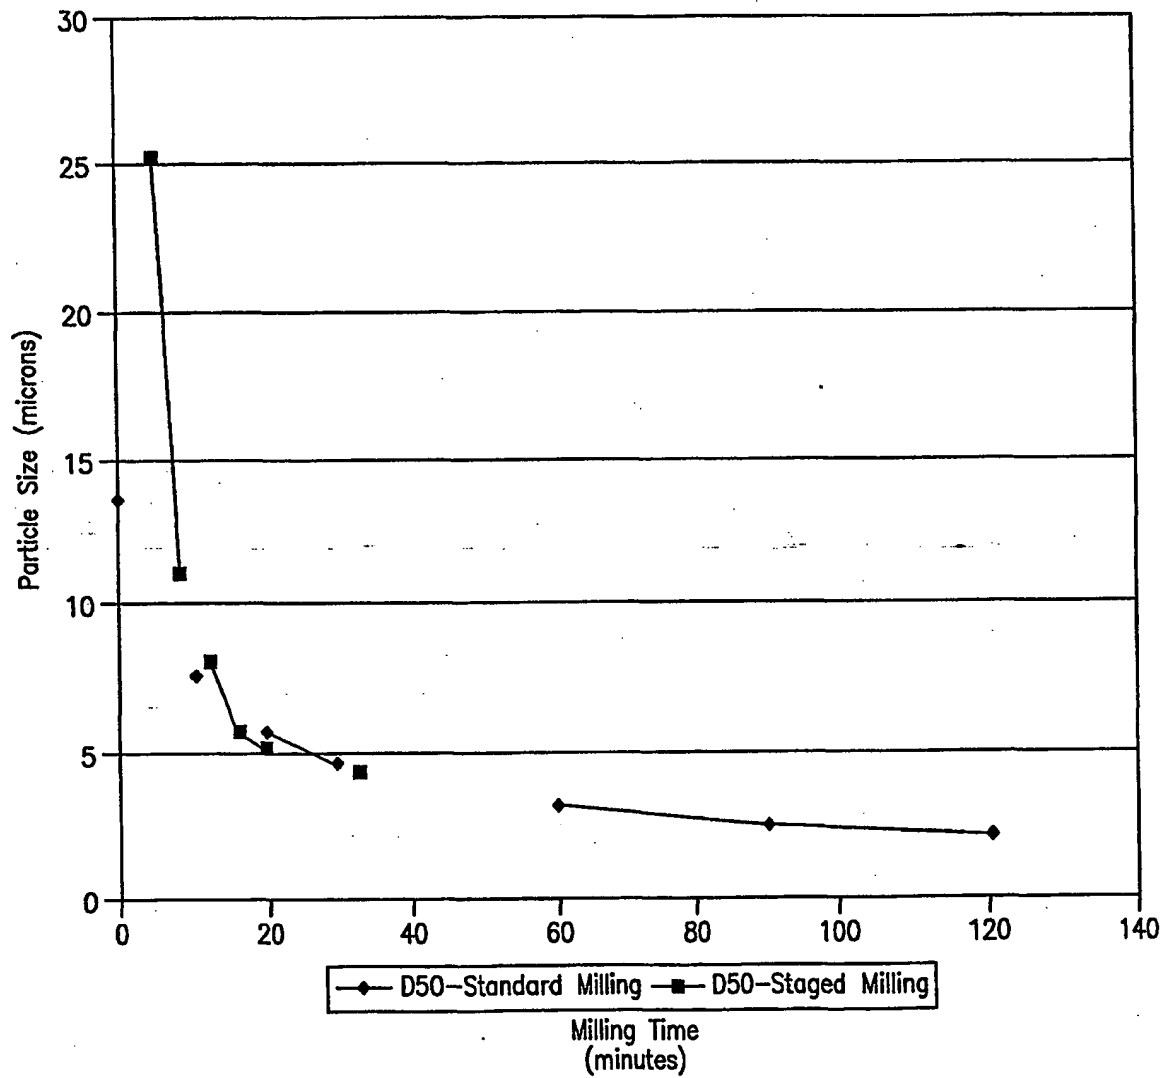


FIG. 1

2 / 2

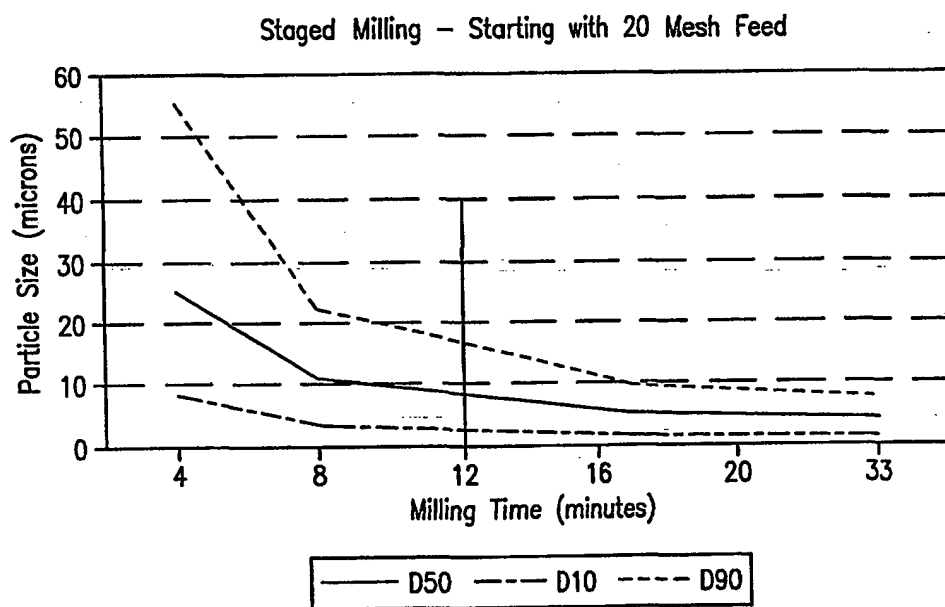


FIG. 2

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number  
**WO 02/068333 A3**

(51) International Patent Classification<sup>7</sup>: **C01G 33/00**,  
C09C 3/04, B02C 17/18, 17/22

(21) International Application Number: PCT/US02/05954

(22) International Filing Date: 27 February 2002 (27.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/271,983 28 February 2001 (28.02.2001) US

(71) Applicant: **CABOT CORPORATION** [US/US]; Two  
Seaport Lane, Suite 1300, Boston, MA 02210-2019 (US).

(72) Inventors: **KITCHELL, Ricky, W.**; 110 Spring View  
Drive, Douglassville, PA 19518 (US). **WOLBACH,**  
**Heather, L.**; 15 Hilltop Drive, Cherry Hill, NJ 08003  
(US).

(74) Agents: **CHEATHAM, Timothy, A.** et al.; Cabot Corpo-  
ration, 157 Concord Road, P.O. Box 7001, Billerica, MA  
01821-7001 (US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CZ,  
DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI,  
SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VN, YU,  
ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR,  
GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent  
(BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR,  
NE, SN, TD, TG).

**Published:**

— with international search report

(88) Date of publication of the international search report:  
13 February 2003

*For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.*

(54) Title: METHODS OF MAKING A NIOBIUM METAL OXIDE

(57) Abstract: Methods to at least partially reduce a niobium oxide are described. In one embodiment, a milling process is described wherein the surfaces of the mill in contact with the starting metal oxide, getter material, and/or oxygen reduced metal oxide are the same as the material being milled. Other milling techniques and products are also described.

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/05954

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 C01G33/00 C09C3/04 B02C17/18 B02C17/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 C01G C09C B02C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, IBM-TDB

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 00 56486 A (CABOT CORP) 28 September 2000 (2000-09-28) cited in the application the whole document	1-29
A	WO 00 15556 A (CABOT CORP) 23 March 2000 (2000-03-23) cited in the application the whole document	1-29
A	WO 00 15555 A (CABOT CORP) 23 March 2000 (2000-03-23) cited in the application the whole document	1-29

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

11 September 2002

Date of mailing of the international search report

19/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Drouot-Onillon, M-C

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/05954

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0056486	A	28-09-2000	AU 3755400 A	09-10-2000
			CZ 20013359 A3	15-05-2002
			EP 1171254 A1	16-01-2002
			WO 0056486 A1	28-09-2000
			US 6402066 B1	11-06-2002
WO 0015556	A	23-03-2000	AU 6045599 A	03-04-2000
			BR 9913728 A	15-01-2002
			CN 1320104 T	31-10-2001
			CZ 20010953 A3	13-02-2002
			EP 1115659 A1	18-07-2001
			JP 2002524379 T	06-08-2002
			WO 0015556 A1	23-03-2000
			US 6416730 B1	09-07-2002
			US 6322912 B1	27-11-2001
			US 2002028175 A1	07-03-2002
WO 0015555	A	23-03-2000	US 6391275 B1	21-05-2002
			US 6416730 B1	09-07-2002
			AU 6041299 A	03-04-2000
			BR 9913828 A	18-12-2001
			CN 1320103 T	31-10-2001
			CZ 20010952 A3	13-02-2002
			EP 1115658 A1	18-07-2001
			JP 2002524378 T	06-08-2002
			TW 460414 B	21-10-2001
			WO 0015555 A1	23-03-2000
			US 6373685 B1	16-04-2002
			US 2001036056 A1	01-11-2001